


INDUCTOR BULK STORAGE TANKS

Inductor Tanks are selected as supply tanks for indoor or outdoor applications and feature conical bottoms to facilitate liquid drain out. Tanks feature a bulkhead fitting for supply line connection. New "Full-Drain" tanks are available with molded in threaded outlet for complete drainage. Tanks require stands to support the conical bottoms. Tanks are manufactured from medium-density polyethylene with U.V. inhibitors and designed for containment of liquids of up to 1.7 specific gravity. Tank walls are translucent for level viewing and equipped with gallon indicators.

PART NO.	CAPACITY	WEIGHT	DIMENSIONS (diameter x height)	LID	FITTING
IN0015-19 [†]	15 Gallon	10	19 x 24	12"	2" FPT
INFD15-19 [†]	15 Gallon Full Drain	10	19 x 27	12"	1 1/2" FPT BOSS
IN0015-19SM [†]	15 Gallon Side Mount	8	19 x 24	12"	2" FPT
IN0030-24 [†]	30 Gallon	15	24 x 30	12"	2" FPT
INFD30-24 [†]	30 Gallon Full Drain	15	24 x 33	12"	1 1/2" FPT BOSS
IN0040-30 [†]	40 Gallon Full Drain	26	30 x 34	12"	2" MPT BOSS
IN0060-24 [†]	60 Gallon x 24	22	24 x 42	12"	2" FPT
INFD60-24 [†]	60 Gallon x 24 Full Drain	22	24 x 46	12"	1 1/2" FPT BOSS
INFD60-30 [†]	60 Gallon x 30 Full Drain	26	30 x 38	16"	2" MPT BOSS
IN0085-30	85 Gallon	35	30 x 43	12"	2" FPT
IN0110-30	110 Gallon	42	30 x 51	12"	2" FPT

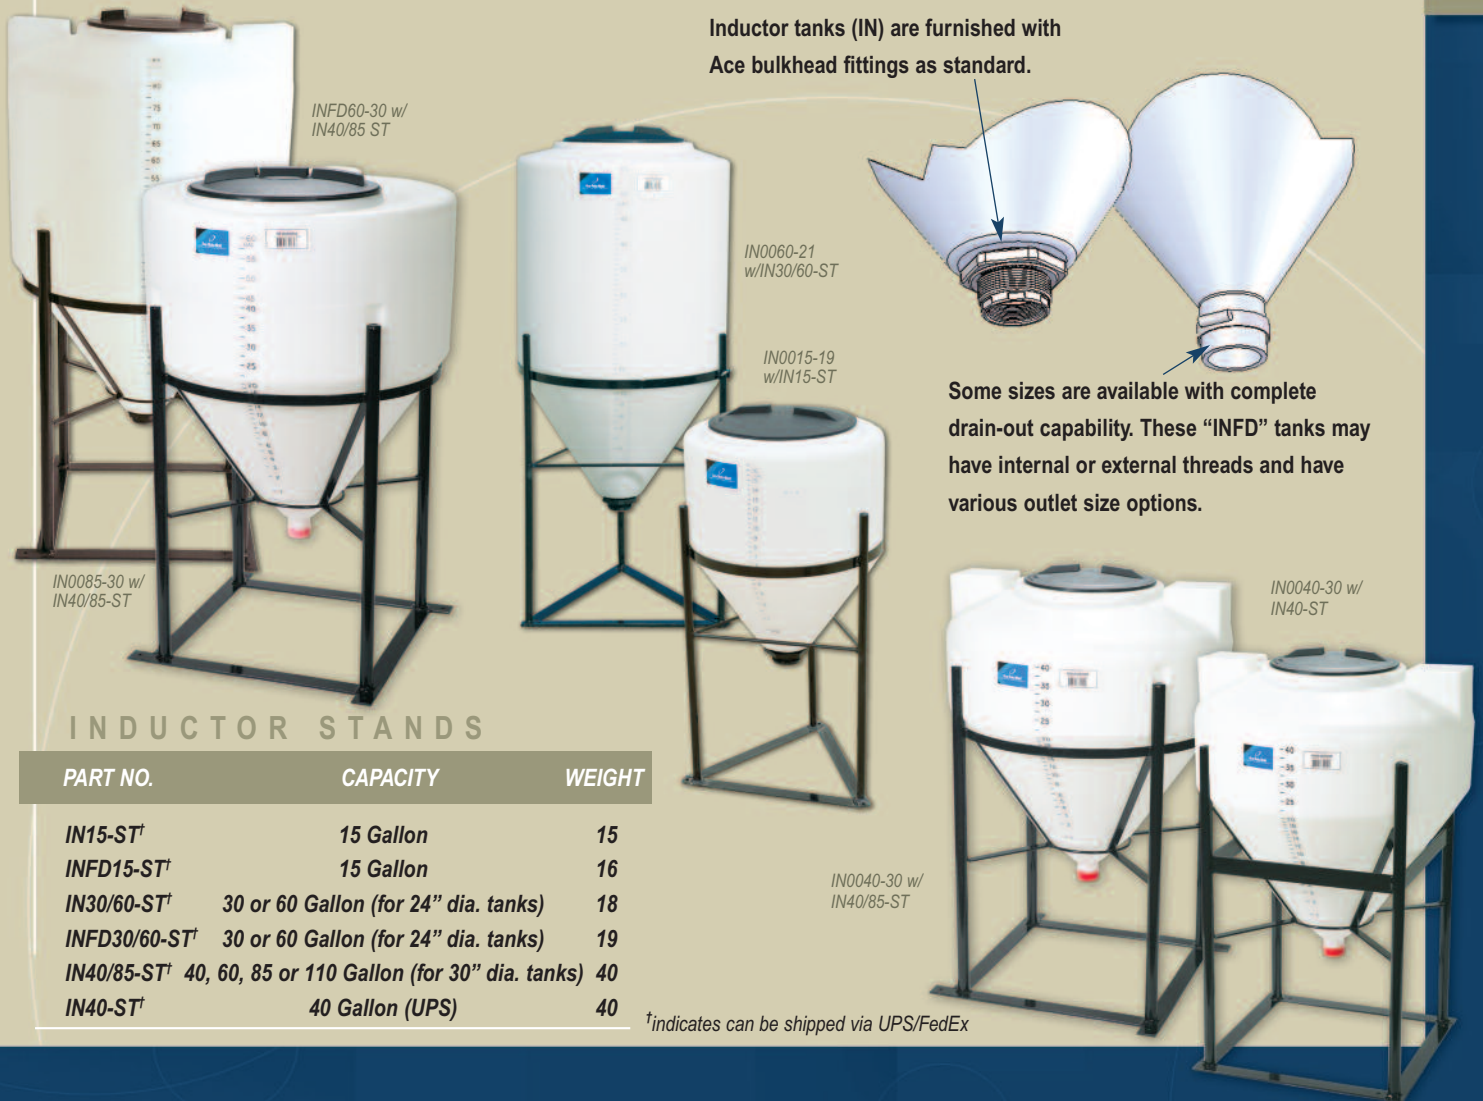

Inductor tanks (IN) are furnished with Ace bulkhead fittings as standard.

Some sizes are available with complete drain-out capability. These "INFD" tanks may have internal or external threads and have various outlet size options.

INDUCTOR STANDS

PART NO.	CAPACITY	WEIGHT
IN15-ST [†]	15 Gallon	15
INFD15-ST [†]	15 Gallon	16
IN30/60-ST [†]	30 or 60 Gallon (for 24" dia. tanks)	18
INFD30/60-ST [†]	30 or 60 Gallon (for 24" dia. tanks)	19
IN40/85-ST [†]	40, 60, 85 or 110 Gallon (for 30" dia. tanks)	40
IN40-ST [†]	40 Gallon (UPS)	40

[†]indicates can be shipped via UPS/FedEx