


SPOT SPRAYER APPLICATOR TANKS

Spot Sprayer Tanks are designed as portable applicator supply tanks and are equipped with pump and equipment mount inserts. Tanks are equipped with molded in legs to support the tank and band locators for tie down. Tanks mount with bottom inserts. Tanks are manufactured from linear low-density polyethylene with U.V. inhibitors and designed for containment of liquids of up to 1.7 specific gravity. Tank walls are translucent for level viewing and equipped with gallon indicators.

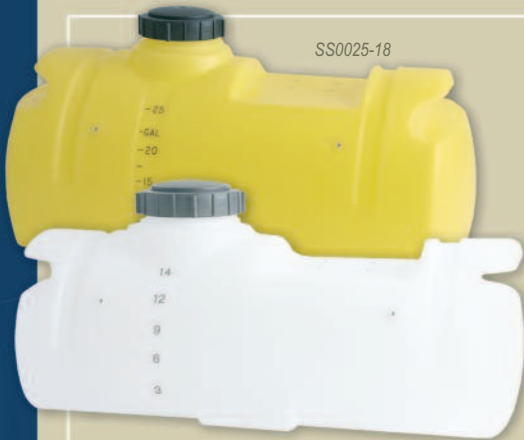

SS0025-18

SS0014-14



SB00060

SB00060



SB00040 Pallet



SB00040

PART NO.	CAPACITY	WEIGHT	DIMENSIONS (width x length x height)	LID	
SM0014-14S [†]	14 Gallon	with sump	8	14 x 30 x 14	5"
SS0014-14 [†]	14 Gallon	without sump	8	14 x 30 x 14	5"
SM0025-18S [†]	25 Gallon	with sump	14	18 x 34 x 18	5"
SS0025-18 [†]	25 Gallon	without sump	14	18 x 34 x 18	5"

[†]indicates can be shipped via UPS/FedEx

BLOW MOLDED APPLICATOR TANKS

Blow Molded Applicator Tanks are designed with injection-molded leg inserts that allow the tanks to be anchored for transportable applications. They are furnished with brass inserts for pump and wand clip mounting. Tanks are manufactured from high-density polyethylene with U.V. stabilizers and designed for containment of liquids up to 1.7 specific gravity. Tanks are equipped with U.S. gallon and metric indicators for liquid level viewing. These tanks are available in white or yellow.

PART NO.	CAPACITY	WEIGHT	DIMENSIONS (width x length x height)	LID
SB00040	40 Gallon	18	24 x 36 x 19	5"
SB00060	60 Gallon	21	24 x 36 x 26	5"

* Blow Molded Applicator Tanks are also offered in pallet quantities. The 40 gallon tanks are available 10 to a pallet and the 60 gallon tanks are 8 to a pallet.